

Research Article

Open Access

Displacement of Reservoir Oil by Nanoflooding: Physicochemical Mechanisms

Sudad H Al-Obaidi^{1*} and Falah H Khalaf²

¹Mining University, SPB, Russia

²Oil Exploration Company, Baghdad, Iraq

ABSTRACT

This study explores the physicochemical mechanisms involved in oil displacement by aqueous solutions containing nanoagents. It delves into these critical issues and reveals the primary pathways for innovative solutions. The use of nanoparticles in oil recovery processes can significantly enhance the characteristics of the injected fluid. These enhancements include improvements in viscosity and density and reductions in surface tension. Additionally, nanoparticles can help optimise emulsification, leading to more effective oil recovery overall. During nanoflooding, the properties of the rock matrix change, particularly its wettability and heat transfer coefficient, both of which improve. The physicochemical mechanisms of oil displacement by nanoagents are discussed, along with the influence of the adsorption process on displacement efficiency.

*Corresponding author

Sudad H Al-Obaidi, Mining University, SPB, Russia.

Received: July 09, 2025; **Accepted:** July 17, 2025; **Published:** July 23, 2025

Keywords: Nanoflooding, Nanoagents, Oil Displacement, Physicochemical Mechanisms, Oil Recovery

Introduction

A large number of geological processes occur at the nanoscale and microscale levels. In this regard, interest in nanoagents of oil displacement is growing [1-4]. Oil and gas nanotechnologies encompass nano flooding, the application of nanocoatings, and the creation of functional systems at the atomic and molecular levels. Oil and gas nanotechnology combines elements of geology, porous media mechanics, physics, and chemistry with engineering developments to exploit the unique properties of nanoparticles that manifest themselves at the nanoscale [5-8]. One practical example of nanotechnology is the use of carbon nanotubes to transport nanoagents directly to the displacement front or residual oil deposits in developed fields. Carbon nanotubes have a stable structure and serve as a type of container for transporting nanoagents within the porous space of rocks to a specific location in the reservoir [9-12]. Sensor nanoagents within carbon nanotubes can be utilised both to monitor the position of the displacement front and to enhance the efficiency of oil recovery. Sensor nano-displacement agents can be controlled in the low-frequency range from the surface, in the so-called monitoring and displacement cycle [13-16]. The monitoring and displacement cycle involves controlling the activation of the nanoagent in a specific zone of the reservoir while recording the time of the nanoagent's injection into the

reservoir. Physicochemical processes involved in the redistribution of substances within various parts of a heterogeneous reservoir system are referred to as sorption. Sorption (from Latin sorbio - to thicken) is a change, usually an increase in the concentration of a component either at the phase boundary, called adsorption, or in the volume of one of the phases, called absorption [17-20]. The solid body on whose surface adsorption occurs is called an adsorbent, and the adsorbed substance is called an adsorbate. Nanoscale sensors integrated directly into laboratory, underground, or surface oil and gas equipment enable the monitoring of displacement, production, and product preparation processes. Many oil and gas exploration companies, such as Saudi Aramco, use nanoagents to identify interphase contacts, locate displacement fronts, and delineate residual oil zones [21-24].

Methodology

The standard method for studying the efficiency of displacing compositions containing surfactants, polymers, and nanoparticles is the nanocore flood experiment (a laboratory study of oil displacement processes using nanoagents on core samples or artificial porous media). During this experiment, a displacing fluid is injected into a crude oil/rock mixture, and the amount of displaced oil is recorded based on the pressure and temperature of the medium [25-28] (Figure. 1).

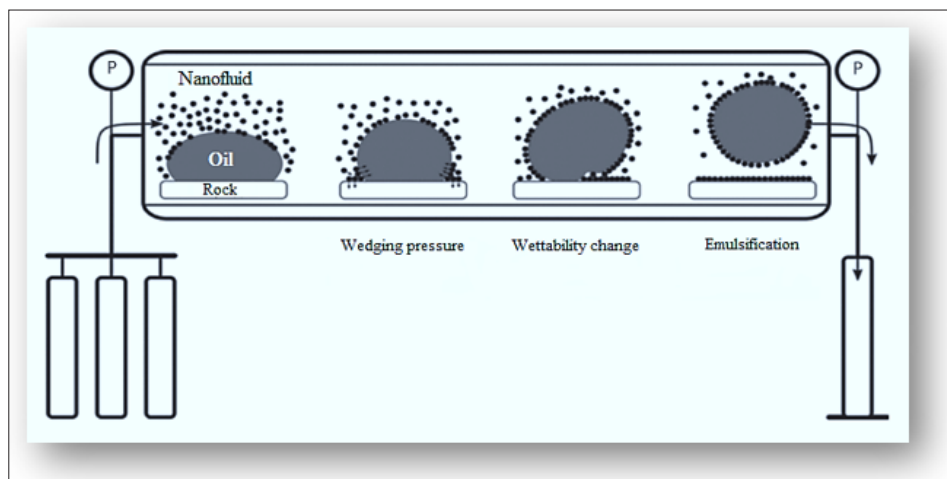


Figure 1: Schematic Diagram Illustrating the Experiment on Oil Displacement by Nanoparticles in Artificial Porous Media, Highlighting Nanocore Flooding and the Primary Mechanisms by which Nano Agents Influence the Reservoir/Oil System.

In the study [25], micromodels of transparent glass with a porosity of 44% and a permeability of 25 d were used. It has been demonstrated that nanofluids at 0.1 wt. % can reduce residual oil saturation. When a nanofluid flows through a porous medium, certain mechanisms can lead to a decrease in the concentration of dispersed nanoparticles. The primary reason for the retention of nanoparticles in a porous medium is adhesion to the pore walls and clogging of the pore mouths. Clogging of pore channels with nanoagents has a beneficial effect on oil recovery [29-32]. In this study, a series of experiments was conducted to investigate the variations in interfacial tension values between oil and various types of nanofluids, aiming to achieve a significant enhancement in oil recovery.

Results and Discussions

A series of experiments have been conducted to study how the interfacial tension values change between oil and various nanofluids. The injection of nanoparticles, in the form of silicon dioxide, significantly affects the interfacial tension at the oil-water interface (Fig. 2A). To investigate the impact of various types of nanoparticles on surface tension, the studies were conducted using silicon oxide and aluminium oxide nanofluids at different temperatures and atmospheric pressure. The results showed that the SiO₂ nanofluid exhibited a lower interfacial tension value compared to the Al₂O₃ nanofluid (see Figure. 2 B).

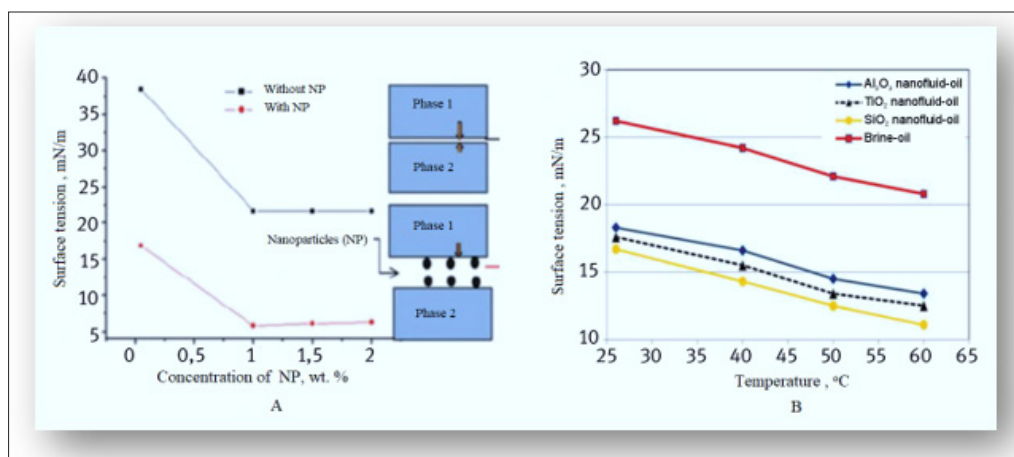


Figure 2: Formation Interfacial Tension . A - Interfacial Tension between two Liquid Phases, With and without the Presence of Nanoparticles. B- At the Oil-Water Interface, Observed at Various Temperatures and at Atmospheric Pressure.

Additionally, studies were conducted to examine the wetting characteristics of the rock using different types of nanofluids, as the sandstone rock sample was primarily oil-saturated. Wettability graphs for all samples are shown in Figure 3a.

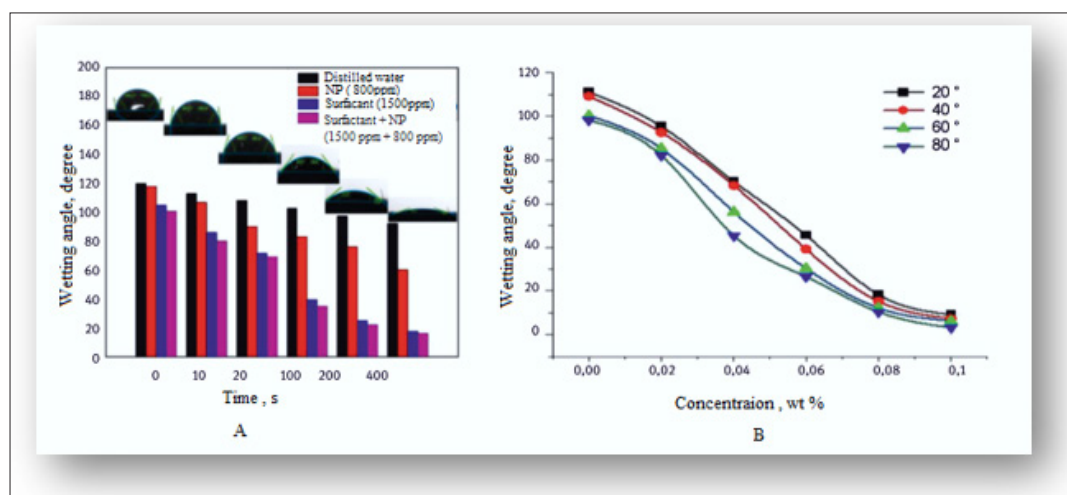


Figure 3: Wettability graphs: A) Wetting angles of various samples, including distilled water, nanoparticles (800 ppm), surfactants (1,500 ppm), and a combination of surfactants and nanoparticles (1,500 ppm + 800 ppm); B) The influence of silicon dioxide nanoparticle concentration on the wetting angle. Distilled water reduced the contact angle from 120° to 92°, indicating that the rock surface is moderately wettable. The SiO₂ nanofluid reduced the contact angle to 60 ° from 118°, indicating that the rock surface is preferentially wetted by water. The surfactant solution changed the contact angle from 105 to 17°, indicating that the rock surface is predominantly water-wet. The contact angle value decreased from 100.2 to 16.2° for the surfactant-SiO₂ nanofluid (1,500 ppm + 800 ppm) suspension. The results indicate that the presence of SiO₂ nanoparticles in the surfactant solution provides better overall wettability properties. The presence of SiO₂ nanoparticles can influence the strong physicochemical interactions that occur at the liquid-solid interfaces, resulting in a favourable change in wettability for oil recovery. Many studies have focused on identifying the concentration ranges of nanoparticles and their effects on wettability modification [33-36]. Most studies have shown that with increasing nanoparticle concentration, rock wettability improves due to repulsive forces. Other studies, on the contrary, indicate that excessive concentrations can lead to pore blockage and increased operating costs [37-40]. Therefore, an ideal concentration is preferable to control wettability. The results indicate that increasing the concentration of nanoparticles results in a consistent decrease in the contact angle at all temperatures. The ideal concentration is 0.1 wt%, as shown in Figure 3b. Most of the measured contact angle values fall below 70°, which provides strong evidence that nanoparticles can effectively alter the wettability from hydrophobic to hydrophilic [41-44]. Polymers have been successfully used as viscosity-controlling agents to improve recovery efficiency [45-48]. In formations with high temperatures, pressures, and salinity, polymer fluids can decompose, which reduces their viscosity and displacement efficiency. The use of nanoparticles can increase the viscosity of the displacing fluid without reducing stability. The effect of silica nanoparticle dispersions on oil displacement by polymers with different fluid mineralisation is studied. Adding silica nanoparticles to the solution increased stability and showed greater efficiency compared to water and polymer (without nanoparticles) displacement. The study was conducted to investigate the dependence of the viscosity of the injected solutions on the concentration of nanoparticles (Figure. 4A).

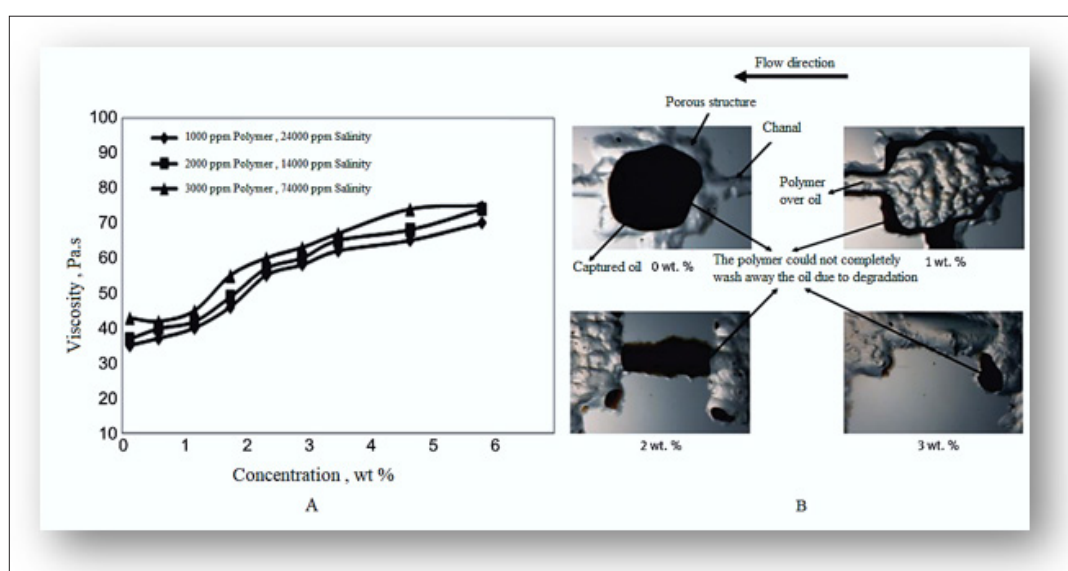


Figure 4: An analysis of the impact of nanoparticles on polymer flooding: A - Silica nanoparticle concentration influences the viscosity of polymer solutions at different salinities and polymer concentrations, B - Residual oil and polymer solution distribution at the pore scale during polymer flooding with a 1,000 ppm polymer solution (24,000 ppm salinity) and varying silica nanoparticle concentrations.

As shown in this figure, the results of viscosity measurements indicate that increasing the concentration of nanoparticles increases the viscosity of the polyacrylamide solution at all salinities and polymer concentrations.

During each nanoflooding test, high-resolution micrographs were taken to visualise the distribution of fluid in the pores and channels. All of these micrographs demonstrate an increase in the efficiency of inter-porous transport resulting from the increase in nanoparticle concentration. Figure 4B shows that the entrapped oil is at its maximum by volume.

The primary factors influencing the mechanism of oil recovery during nanoflooding are changes in the wettability of reservoir rocks, reduction of interfacial tension, and plugging of pore channels. Wettability is characterised by the wetting angle, which can change more than 2 times under the influence of nanodispersion. In this case, the main reason for the change in the wetting angle is the wedging pressure, which begins to increase when nanoparticles are introduced between the rock surface and the oil phase.

A decrease in surface tension reduces capillary pressure in pores. This mechanism, resulting from a significant change in the wetting angle, can be considered one of the primary parameters influencing the increase in oil recovery. A decrease in interfacial tension occurs due to a reduction in free surface energy, which depends on the integration area. This is accompanied by the division of large droplets into smaller ones, facilitating their migration through the porous medium. It should be noted that the decrease in interfacial tension compared to the surfactant is insignificant and does not have a major effect. The main mechanism is the clogging of pore channels. This process begins with the formation of nanoparticle conglomerates, which eventually form a “plug” that clogs the mouth of the pore channel. In this case, the fluid flow is redirected, thereby displacing oil from previously unaffected parts of the channels. The use of nanoparticles helps increase capillary pressure values and oil recovery by enhancing wettability in carbonate reservoirs. All the mechanisms described contribute to enhanced oil recovery.

Consequently, altering the wettability of rocks, minimising the interfacial tension at the oil-water boundary, managing the mobility coefficient, and temporarily obstructing pore channels are the primary factors that enhance oil recovery when employing the combined polymer flooding method.

Conclusions

The use of nanoparticles can enhance capillary pressure and improve oil recovery in carbonate reservoirs by increasing wettability. It was confirmed that the use of these nanoparticles reduces surface tension, leading to a decrease in capillary pressure within the pores. This mechanism, caused by a significant change in the wetting angle, can be considered one of the main factors influencing increased oil recovery. Utilising nanoparticles provides a significant advantage by effectively blocking pore channels through the formation of nanoparticle conglomerates. This crucial process redirects fluid flow, ensuring that oil is displaced from areas of the channels that previously remained unaffected.

Generally, nanotechnology offers promising solutions for enhancing oil recovery. Although the complete impact of nanotechnology on the future of the oil industry is still being investigated, it has the potential to revolutionize the field.

References

1. Dayo Afekare, Ipsita Gupta, Dandina Rao (2020) Nanoscale investigation of silicon dioxide nanofluids and implications for enhanced oil recovery An atomic force microscope study, *Journal of Petroleum Science and Engineering* 191: 107165.
2. AL-Obaidi S H., Hofmann M, Smirnova V (2022) Improvement Of Oil Recovery In Hydrocarbon Fields By Developing Polymeric Gel-Forming Composition. *Natural Science & Advanced Technology Education* 31: 425-435.
3. Kamensky Igor P, Al-Obaidi Sudad H, Khalaf Falah H (2024) An Application of Polymer Nanocomposites Based On Carboxymethylcellulose along with Aluminium (Al) and Copper (Cu) Nanoparticles for Increasing Oil Production. *Pet Petro Chem Eng J* 8: 000383.
4. AL-OBAIDI S (2007) Analysis of hydrodynamic methods for enhancing oil recovery. *Journal of Petroleum Engineering and Technology* 6: 20-26.
5. Peng Baoliang, Juntao Tang, Jianhui Luo, Pingmei Wang, Bin Ding, et al. (2017) Applications of Nanotechnology in Oil and Gas Industry: Progress and Perspective. *The Canadian Journal of Chemical Engineering* 96: 10.1002/cjce.23042.
6. AL-OBAIDI SH (2015) The Use of Polymeric Reactants for EOR and Waterproofing. *Journal of Petroleum Engineering and Emerging Technology* 1: 1-6.
7. Smirnov V, AL-OBAIDI S (2008) Innovative methods of enhanced oil recovery. *Oil Gas Res* 1: e101.
8. Al-Obaidi SH (2016) Improve the efficiency of the study of complex reservoirs and hydrocarbon deposits – East Baghdad field. *International journal of scientific & technology research* 5: 129-131.
9. Li Y, Li Z, Fikret Aydin, Jana Quan, Xi Chen, et al. (2020) Water-ion permselectivity of narrow-diameter carbon nanotubes. *Sci Adv* 6: eaba9966
10. Al-Obaidi S H, Patkin A, Guliaeva NI (2003) Advance use for the NMR relaxometry to investigate reservoir rocks. *JoPET* 2: 45-48.
11. Kamensky IP, Al-Obaidi SH, Khalaf F (2020) Scale effect in laboratory determination of the properties of complex carbonate reservoirs. *Int Res J Mod Eng Technol Sci* 2: 1-6.
12. Al-Obaidi SH, Guliaeva NI (2002) Determination of flow and volumetric properties of core samples using laboratory NMR relaxometry. *J Petrol Eng Technol* 1: 20-23.
13. Marwan Y Rezk, Nageh K Allam (2019) Impact of Nanotechnology on Enhanced Oil Recovery: A Mini-Review, *Industrial & Engineering Chemistry Research* 58: 16287-16295
14. Al-Obaidi S (2019) Investigation of rheological properties of heavy oil deposits. In *Conference of the Arabian J Geosciences*. Cham: Springer Int Publish 399-402.
15. Miel H, Hameed AOS, Hussein KF (2022) Modelling and monitoring the development of an oil field under conditions of mass hydraulic fracturing. *Trends in Sciences* 19: 3436.
16. Al-Obaidi SH, Khalaf FH (2023) A New Approach for Enhancing Oil and Gas Recovery of the Hydrocarbon Fields with Low Permeability Reservoirs. *Pet Petro Chem Eng J* 7: 000343.
17. SN Rao, Vincent Bal (2018) *Interface Science and Technology*, Elsevier 21: 251-331.
18. Al-Obaidi SH, Guliaeva NI (2017) Thermal adsorption processing of hydrocarbon residues. *J Catal* 4: 6-10.
19. Hofmann M, Al-Obaidi SH, Kamensky IP (2021) Calculation method for determining the gas flow rate needed for liquid removal from the bottom of the wellbore. *J Geol Geophys* 10: 1-5.

20. AL-Obaidi SH, Kamensky IP, Smirnov VI (2020) Investigation Of Thermal Properties Of Reservoir Rocks At Different Saturation, *International Research Journal of Modernization in Engineering Technology and Science* 2: 12-17.
21. Khaled R Arouri, Salah H Al-Saleh, Ziyad M Al-Hilal (2009) Residual oil as a tool in migration and filling history analysis of petroleum reservoirs, Ghazal Field, Saudi Arabia, *Organic Geochemistry* 40: 617-627.
22. Al-Obaidi SH, Wang JC, Hofmann M (2022) Modelling the development of oil rim using water and gas injection. *Nat Sci Adv Technol Edu* 31: 279-292.
23. Chang WJ, Al-Obaidi SH, Patkin AA (2021) The use of oil soluble polymers to enhance oil recovery in hard to recover hydrocarbons reserves. *Int Res J Mod Eng Technol Sci* 3: 982-987.
24. Al-Obaidi SH, Kamensky IP (2022) Express study of rheological properties and group composition of oil and condensate using nuclear magnetic resonance-relaxometry. *J Oil Gas Coal Technol* 4: 102.
25. Hendraningrat L, Li S, Torsæter O (2013) A coreflood investigation of nanofluid enhanced oil recovery. *Journal of Petroleum Science and Engineering* 111: 128–138.
26. Obaidi SHA, Chang WJ (2024) Techniques to Boost Oil Production in the Development of Multi-Reservoir Fields. *J Earth Environ Waste Manage* 2: 1-7.
27. Patkin A, Al-Obaidi SH (2001) Influence of Temperature and Pressure of Incoming Oil- Containing Liquid from Field Wells on the Gas Separation Process. *J Petro Eng Emerging Techno* 3: 20-24.
28. Al-Obaidi SH (2009) Experimental study of the influence of fluid flow rate on the risk of rock destruction. *J Pet Eng Emerg Technol* 9: 84-89.
29. Kandiel YE, Attia GM, Metwalli FI, Rafik E. Khalaf, Omar Mahmoud, et al. (2025) Nanoparticles in enhanced oil recovery: state-of-the-art review. *J Petrol Explor Prod Technol* 15: 66
30. Al-Obaidi SH (2016) High oil recovery using traditional water-flooding under compliance of the planned development mode. *J Petro Eng Techno* 6: 48-53.
31. Chang WJ, Al-Obaidi SH, Patkin AA (2021) Assessment of the condition of the near-wellbore zone of repaired wells by the skin factor. *Int Res J Mod Eng Tech Sci* 3: 1371-1377.
32. AL-Obaidi SH, Hofmann M , Kamensky IP (2010) Changes in the Physical Properties of Hydrocarbon Reservoir as a Result of an Increase in the Effective Pressure During the Development of the Field, *Journal of Petroleum Engineering & Technology* 1: 61-21.
33. Eltoum H, Yang YL, Hou JR (2021) The effect of nanoparticles on reservoir wettability alteration: a critical review. *Pet Sci* 18: 136–153.
34. Al-Obaidi SH, Khalaf FH, Viktor S (2025) Utilizing Machine Learning to Evaluate the Connection Between Poisson's Ratio and the Petrophysical Properties of Reservoir Rocks. *J Petro Chem Eng* 1: 49-54.
35. Hofmann M, Al-Obaidi SH, Chang WJ (2023) Evaluation of Quantitative Criteria for Triassic Reservoirs in The South Mangyshlak Basin. *Natural Sci Advanced Techno Education* 32: 1.
36. Sudad H AL-Obaidi (2020) A way to increase the efficiency of water isolating works using water repellent, *International Research Journal of Modernization in Engineering Technology and Science* 2: 393-399.
37. Tinuola H Udoh (2021) Improved insight on the application of nanoparticles in enhanced oil recovery process, *Scientific African* 13: e00873.
38. Obaidi SH, Khalaf FH (2020) Prospects for improving the efficiency of water insulation works in gas wells. *J Geol Geophys.* 9: 483.
39. Hofmann M, Al-Obaidi SH, Patkin AA (2013) Problems of transporting” heavy” gas condensates at negative ambient temperatures and ways to solve these problems. *JoPET* 3: 31-35.
40. Al-Obaidi SH, Khalaf F (2019) Development of traditional water flooding to increase oil recovery. *Inter J Sci Technol Res* 8: 177-181.
41. Marwa Emmanuel (2024) Unveiling the revolutionary role of nanoparticles in the oil and gas field: Unleashing new avenues for enhanced efficiency and productivity, *Heliyon* 10: e33957.
42. Al-Obaidi SH, Hofmann M, Khalaf FH (2023) Enhanced Oil Recovery In Terrigenous Oil Fields Using Low-Salt Water, *Natural Sciences and Advanced Technology Education* 32: 2.
43. Alexander G, Sudad AO, Viktor S (2023) Numerical Simulation of Water Alternating Gas Injections (WAG) into Hydrocarbon Reservoirs: Factors Influencing Oil Recovery. *J Geol Geophys* 12: 1147.
44. Al-Obaidi SH, Guliaeva NI, Smirnov VI (2009) Influence of structure forming components on the viscosity of oils. *Int J Sci Technol Res* 9: 347-351.
45. Abhishek Tyagi, Sugandha Mahajan, Ganshyam Prajapat, Bharat Shivnani, Devesh M Sawant, et al. (2025) A comprehensive review of polymers and their derivatives for enhanced oil recovery, *Journal of Environmental Chemical Engineering* 13: 117601
46. Hofmann M, Al-Obaidi SH, Chang WJ (2024) Evaluating The Efficacy of Water Alternating Gas Injection Technique in The Upper Jurassic Hydrocarbon Reservoirs, Considering Saturation Pressure. *Nat Sci Advanced Techno Education* 33: 4.
47. AL-OBAIDI S, CHANG WJ, KHALAF FH (2024) Offshore Heavy Oil Displacement Using Water Flooding: Flow Characteristics and Efficiency. *Natural Sciences and Advanced Technology Education* 33: 91-110.
48. Al-Obaidi SH, Galkin AP (2025) The Assessment of Reservoir Pressure and Recoverable Hydrocarbon Reserves Using Production Well Research Data. *J Geol Min* 2: 1-6.

Copyright: ©2025 Sudad H Al-Obaidi. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.